Models

HP 2560p Docking Station	LE877AA
HP 2740 Ultra-Slim Expansion Base	WA995AA

HP 2560p Docking Station

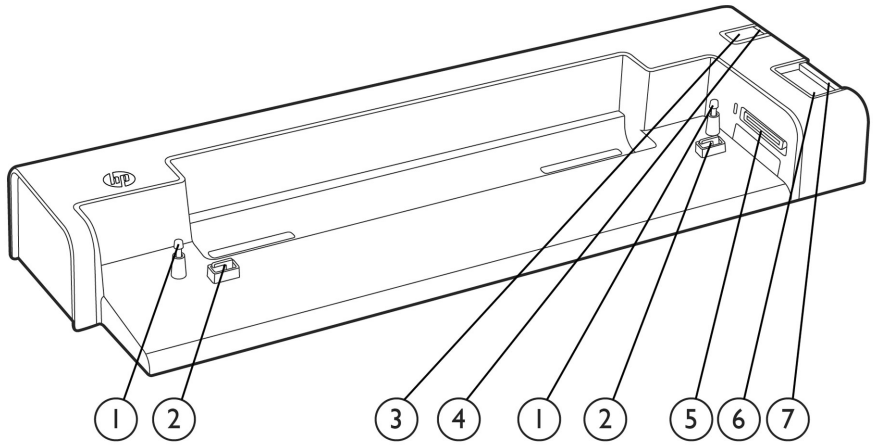

1. Docking posts
2. Computer connect/release mechanisms
3. Power button
4. Computer power light
5. Docking connector
6. Connect button
7. Connect light

HP 2560p Docking Station Rear/Right Side

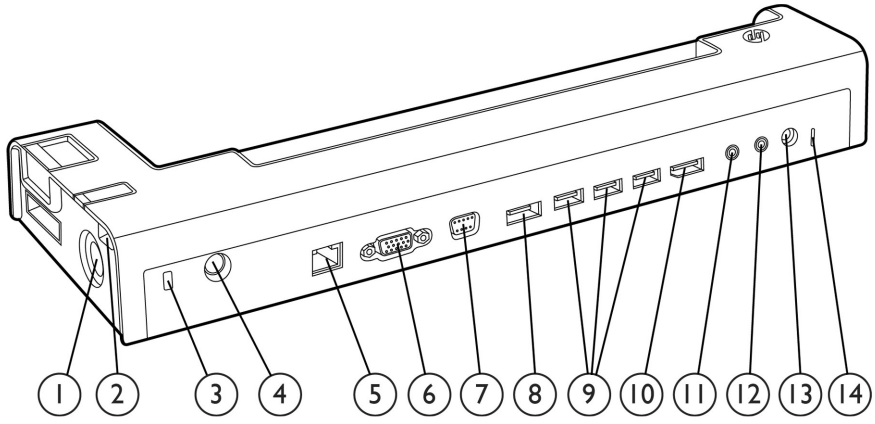

1. HP Lock (Lock not included)
8. eSATA port

Overview

2. Powered USB 2.0 port
3. Security lock slot
4. HP Lock slot
5. LAN/Ethernet jack
6. VGA port
7. Monitor stand port
9. USB 2.0 ports (3)
10. DisplayPort
11. Audio-in jack
12. Audio-out jack
13. Power connector
14. Power in LED (indicates docking station is plugged in)

HP 2560p Docking Station

Front Components	
Docking posts (2)	Align and secure the computer for proper connection to the docking station
Computer connect/ release mechanisms (2)	Connect and release the computer when you press the connect button
Power button	Turns on the power to the computer
Computer power light	Light on: docked computer is turned on Light blinking: docked computer is in standby mode
Docking connector	Connects the computer to the docking station
Connect button	Secures and releases the computer Slide in to secure the computer Slide out to release the computer
Connect light	On: a computer is fully docked
Rear/Right-Side Components	
AC power port	Energy-efficient 65W Smart AC adapter features integrated surge protection to help against power fluctuations.
Powered USB port	One; allows you to connect to select USB devices
Integrated cable lock slot	Supports the HP Docking Station Cable Lock with a simplified locking mechanism. Gives you two security options: lock the docking station only (which also prevents access to the Station drive bay); or lock both the docking station and your notebook for additional security. Also supports an industry standard notebook lock.
Network connectors	Ethernet ports
USB ports	4 USB 2.0 ports (1 powered)
Audio connectors	Audio in, audio out (does not support mic out)
Other connectors	Monitor stand power, VGA, DisplayPort, eSATA

Overview

HP 2740 Ultra-Slim Expansion Base

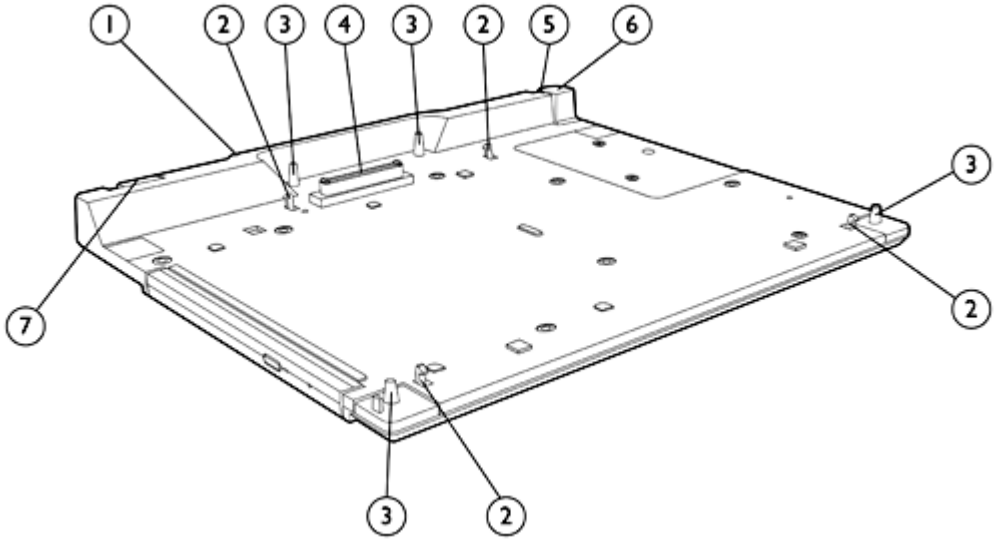

1. AC power connect light
2. Computer connect/release mechanisms
3. Docking posts
4. Docking connector
5. Connection light
6. Connection latch
7. Cable lock selection slider

HP 2740 Ultra-Slim Expansion Base Rear/Right Side

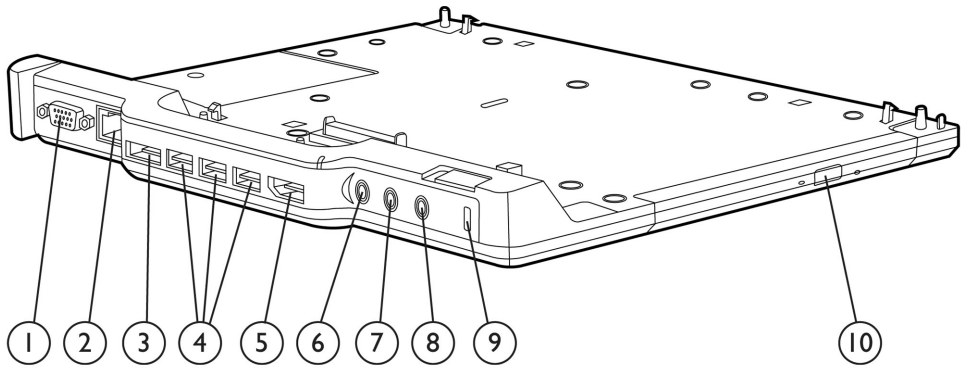

1. VGA port
2. LAN/Ethernet port
3. eSATA port
4. USB 2.0 ports (3)
5. DisplayPort
6. Audio-in jack
7. Audio-out jack
8. Power connector
9. Notebook lock slot
10. Optical drive

Overview

HP 2740 Ultra-Slim Expansion Base

Top Components	
Docking posts (2)	Align and secure the computer for proper connection to the docking station
Computer connect/ release mechanisms (2)	Connect and release the computer when you press the connect button
Docking connector	Docking connector for notebook or travel battery
Connect button	Secures and releases the computer Slide in to secure the computer Slide out to release the computer
LEDs	AC present: aqua white; Dock connected: blue; two RJ45 LEDs: amber/green
Rear/Right-Side Components	
AC power port	Energy-efficient 65W Smart AC adapter features integrated surge protection to help against power fluctuations.
Optical drive	9.5mm PATA DVD +/-RW Optical drive
Integrated cable lock slot	Supports the HP Docking Station Cable Lock with a simplified locking mechanism. Gives you two security options: lock the docking station only (which also prevents access to the Station drive bay); or lock both the docking station and your notebook for additional security. Also supports an industry standard notebook lock.
Network connectors	RJ-45 / Ethernet pass thru
USB ports	3 USB 2.0 ports
Audio connectors	Headphone output (stereo); microphone input (stereo)
Other connectors	VGA, DisplayPort, eSATA

Technical Specifications

	HP 2560p Docking Station	HP 2740 Ultra-Slim Expansion Base
Dimensions (H x W x D)	14.1 x 4.8 x 2.0 in (35.9 x 12.1 x 5.1cm)	0.5 x 9.06 x 10.5 in (1.27 x 2.3 x 2.69 cm)
Weight	2.04 lb (0.93 kg)	1.73 lb (0.79kg)
Stand-alone power requirements		
Normal Operating Voltage	18.5 V	
Average Operating Power	18.5 W	
Max Operating Power	< 65 W	
Temperature		
Operating	32° to 95° F (0° to 35° C)	
Non-operating	4° to 140° F (-20° to 60° C)	
Relative humidity		
Operating	10% to 90%, non-condensing	
Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature	
Altitude		
Operating	-50 to 10,000 ft (-15.24 to 3,048 m)	
Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)	
Shock		
Operating	125 G, 2 ms, half-sine	
Non-operating	200 G, 2 ms, half-sine	
Random vibration		
Operating	0.75 grms	
Non-operating	1.50 grms	
Option Kit Contents	HP 2560p Docking Station, AC power adapter, documentation	HP 2740 Ultra-Slim Expansion Base, AC power adapter, documentation

Compatibility

HP Ultra-light Docking Stations are compatible with HP EliteBook Notebook and Tablet PCs as follows:

Docking Station	Compatible Notebooks
HP 2560p Docking Station	HP EliteBook 2540p and 2560p Notebook PC[1]
HP 2740 Ultra-Slim Expansion Base	HP EliteBook 2740p and 2760p Tablet PC

Service and Support

HP Ultra-light Docking Stations are supported by a one-year limited warranty. Additional support is available 24 hours a day, seven days a week by phone as well as online support forums.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.

[1] The combination of the HP EliteBook 2540p Notebook PC with the HP 2560p Docking Station may result in a limited functionality of some of the docking station's connectors.

© Copyright 2011 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.